


# Overview CAN-Bus-systems

## CAN-BUS-Node 1362

The CAN-BUS node 1362 is a digital, microprocessor-based controller with signal outputs. It can be used wherever the components to be controlled are relatively far away from the display and control unit.

<b>Nominal voltage:</b>	24V DC
<b>Voltage range:</b>	16 to 32V DC
<b>Inputs:</b>	3 digital inputs aktiv high 8 analog inputs as resistance sensor
<b>Outputs:</b>	10 digital outputs 24V/200mA short circuit proof 2 digital outputs 24V/2A short circuit proof 5 digital outputs 24V/5A short circuit proof 1 digital outputs 24V/10A short circuit proof
<b>Interfaces:</b>	1 CAN-BUS interface
<b>Storage capacity:</b>	64 kByte FLASH 2kByte non volatile memory
<b>Power consumption without load:</b>	82mA (bei 24V)
<b>Total current of all outputs:</b>	Max. 15A
<b>Operating temperature:</b>	-25°C to +85°C
<b>Storage temperature:</b>	-25°C to +85°C
<b>Connection signals and outputs:</b>	1 Multipoint-connector 2.8x0.8, 3 rows, 15-pole AMP-Junior-Timer 1 Multipoint-connector 2.8x0.8, 3 rows, 18-pole, AMP-Junior-Timer 1 Multipoint-connector 2.8x0.8, 3 rows, 21-pole, AMP-Junior-Timer
<b>Connection for CAN-BUS:</b>	1 Multipoint-connector 2.8x0.8, 3 rows, 6-pole, AMP-Junior-Timer
<b>Weight:</b>	0.7 Kg

### Installation dimensions[mm]:

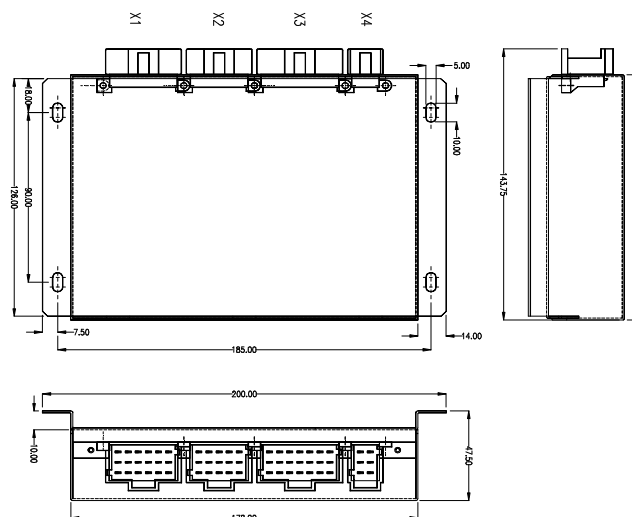

Subject to technical changes!

As of August 2020.

**BADER**  
INDUSTRIE-ELEKTRONIK  
www.badergmbh.de

Elektroniksysteme für Fahrzeugtechnik und Industrieautomation  
71691 Freiberg, Siemensstr.21  
Tel: 07141/ 68877- 0 Fax: 07141/ 68877- 22

Registered at the local court Stuttgart HRB 205971. Managing director Florian Bader.